

MACHEREY-NAGEL PF-3 COD and NANOCOLOR®

favs

Scientific Equipment

Tel. 051 501153 - Fax 051 6336182

www.favs.it - info@favs.it



The perfect team for COD analysis


- Compact photometer with intuitive menu guidance
- Tough and water-proof according to IP 68
- Mobile use right at the point of interest
- more than 9 different measuring ranges with just one instrument

Water Analysis

PF-3 COD and NANOCOLOR®

Reliable COD analysis

COD levels play a major role in assessing communal and industrial waste water. As a sum parameter indicating the organic load of waste water, COD is one of the most important parameters in waste water analysis. Among others, COD values are used to calculate and monitor the purification capacities of waste water plants. The PF-3 COD together with the user friendly NANOCOLOR® tests is ideally suited to obtain information on the COD content (2–60000 mg/L) easily and directly at the place of sampling.

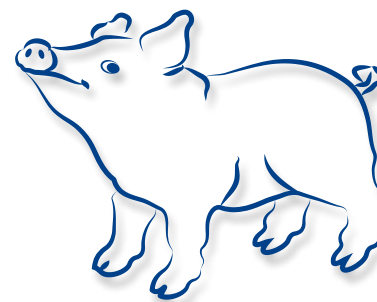

PF-3 COD benefits at a glance



Small and compact

- Handy and light weight
- Glass-fiber reinforced housing
- Water proof according to IP 68
- Shock-resistant optics

Ideal for all your analysis needs in the lab and right at the point of interest



Easy and convenient

- Fully developed menu structure using just 4 buttons
- Optional storage for just one O-measurement
- Results in different units
- Open cuvette slot

Safe results and convenient operation



Smart and clever

- Runs on standard or rechargeable batteries
- Free of charge data export software
- Add new tests and parameters anytime
- Power supply and data transfer via USB port

Flexible use and easy data administration

Technical data compact photometer PF-3 COD

Type:	LED photometer with 3 interference filters
Wavelengths:	365 nm, 450 nm, 595 nm
Wavelength accuracy:	± 2 nm, bandwidth at half transmission 10–12 nm
Measuring modes:	Pre-programmed MN-tests
Cuvette holder:	Tubes 16 mm OD
Memory:	50 results
Display:	Backlit graphic display, 64 x 128 pix, all important data at a glance: results with unit, date, time
Operation:	Self-explanatory menu guidance, foil keypad, test selection via parameter lists
Power supply:	3 AA batteries, rechargeable batteries, USB interface; optional internal accu-pack
Housing:	Water proof, IP 68 certified
Dimensions:	170 x 95 x 68 mm



This device complies with the following directives: EMC Directive 2014-30-EU; LVD Directive 2014-35-EU



www.mn-net.com

PF-3 COD and NANOCOLOR®

NANOCOLOR® benefits at a glance

Reliable and accurate

- Intuitive handling and high measurement accuracy
- Simple chemical-analytical methods
- Reaction principles based on international standards (DIN, EN, ISO)
- Low interference susceptibility ensures safe results

High measurement safety for reliable water analysis



Precise and versatile

- Pre-dosed tubes for quick and easy measurements
- Reaction and detection in the same tube
- No direct contact with chemicals
- Ideal for routine analytics and self-monitoring

Especially high accuracy due to pre-dosed reagents



Fair and economical

- Individual combination of reagent bundles
- Free of charge seminars and product training
- Competent customer service by highly educated and experienced professionals
- Replacement instruments immediately available in case of repairs


Consistently fair concept with impressive price-performance ratio



NANOCOLOR® tests running on the PF-3 COD

NANOCOLOR® test		Measurement range	Test number	No. of tests	REF
COD 40*	ISO 15705	2–40 mg/L O ₂	0–27	20	985 027
COD 60*	ISO 15705	5–60 mg/L O ₂	0–22	20	985 022
COD 160*	ISO 15705	15–160 mg/L O ₂	0–26	20	985 026
COD 600*	ISO 15705	50–600 mg/L O ₂	0–30	20	985 030
COD 1500*	ISO 15705	100–1500 mg/L O ₂	0–29	20	985 029
COD 4000*		400–4000 mg/L O ₂	0–11	20	985 011
COD 10000*		1.00–10.00 g/L O ₂	0–23	20	985 023
COD 15000*		1.0–15.0 g/L O ₂	0–28	20	985 028
COD 60000*		5.0–60.0 g/L O ₂	0–12	20	985 012
COD LR 150	ISO 15705	3–150 mg/L O ₂	0–36	20	985 036
COD HR 1500	ISO 15705	20–1500 mg/L O ₂	0–38	20	985 038

* These products contain harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.

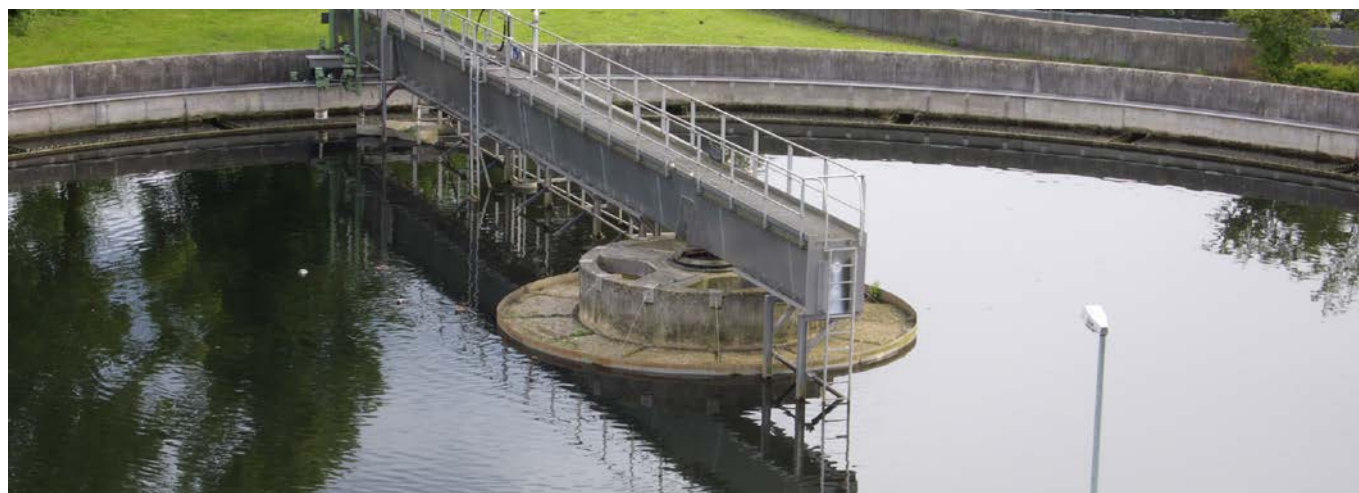

PF-3 COD and NANOCOLOR®

NANOCOLOR® analysis case

To ensure maximum flexibility, MACHEREY-NAGEL offers practical case solutions for a wide variety of applications. These mini labs in tough cases with premium foam inlays are available with or without photometer and can be equipped with different tests for individual needs.

The NANOCOLOR® reagent case with compact photometer PF-3 COD is especially designed for quick COD analysis right at the point of interest. It can be equipped with all the tools that are necessary for your work (heating block, pipettes, etc.). Additionally, up to three NANOCOLOR® COD boxes can be stowed within the case.

The COD tests can be run by chemically inexperienced layman safely, quickly and easily. Furthermore, the NANOCOLOR® COD tests COD 160, COD 600 and COD 1500 conform to the ISO 15705 norms in all areas.



(Example above: fully assembled NANOCOLOR® analysis case. REF 919 212)

Ordering information

Description	REF
Compact photometer PF-3 COD, in a box, incl. manual, batteries and certificate	919 342
Compact photometer PF-3 COD, in a case with foam inlay, incl. manual, batteries and certificate	934 302
NANOCOLOR® analysis case with compact photometer PF-3 COD, with additional space for 1 heating block NANOCOLOR® VARIO C2, 2 pipettes, 3 NANOCOLOR® tube tests and accessories	919 212

* These products contain harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.

For more information please visit www.mn-net.com/PF-3.

MACHEREY-NAGEL GmbH & Co. KG · Neumann-Neander-Str. 6–8 · 52355 Düren · Deutschland



Deutschland
und International:
Tel.: +49 24 21 969-0
Fax: +49 24 21 969-199
E-Mail: info@mn-net.com

Schweiz:
MACHEREY-NAGEL AG
Tel.: +41 62 388 55 00
Fax: +41 62 388 55 05
E-Mail: sales-ch@mn-net.com

Frankreich:
MACHEREY-NAGEL EURL
Tel.: +33 388 68 22 68
Fax: +33 388 51 76 88
E-Mail: sales-fr@mn-net.com

