

BENCHTOP CENTRIFUGES

— ROTINA 420 | 420 R

MANY SOLUTIONS - ONE ROTOR

This compact benchtop centrifuge has been developed for large sample volumes. It has a maximum capacity of 4 x 600 ml bottles, 140 blood tubes, 16 microtiter plates or 52 x 15 ml conical tubes, all on a single cost-effective rotor.

This unit is available with refrigeration and a temperature range from -20 °C to +40 °C (ROTINA 420 R).



— HIGHLIGHTS

- RPM: 50 - 15,000 min<sup>-1</sup>  
Adjustable in increments of 10
- RCF: 50 - 24,400  
Adjustable in steps of 1
- max. capacity: 4 x 600 ml
- High-performance with first-class equipment
- choice of 5 rotors
- IVD-conform according to directive 98/79/EC
- max. noise level of 51 dB(A) with rotor 4790-A
- easy operation with keypad and control knob
- 98 program memories for more individuality
- 9 individual acceleration and deceleration stages
- model 420 R coolable from -20 to +40 °C with pre-cooling function

— FEATURES

- metal housing and lid
- viewing port in the lid
- powered one-hand lid lock
- lid dropping protection
- emergency lid lock release
- stainless steel chamber
- automatic rotor recognition
- brushless drive
- error display
- display in °C and °F possible
- imbalance monitoring and switch-off
- backlit panel with actual values of all parameters
- Auditory message after completion of the centrifugation run

## TECHNICAL DATA


	<b>ROTINA 420</b> non-refrigerated	<b>ROTINA 420 R</b> refrigerated
voltage *)	200–240 V 1 ~	200–240 V 1 ~
frequency	50–60 Hz	50 Hz
consumption	870 VA	1,600 VA
emission, immunity	EN/IEC 61326-1, class B	EN/IEC 61326-1, class B
max. capacity	4 x 600 ml	4 x 600 ml
max. RPM	15,000 min <sup>-1</sup>	15,000 min <sup>-1</sup>
max. RCF	24,400	24,400
running time	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode	1 – 99 h: 59 min: 59 s, ∞ continuous run, short cycle mode
dimensions (WxDxH)	506 x 650 x 423 mm	713 x 654 x 423 mm
weight	approx. 75 kg	approx. 108 kg
noise level	51 dB (A) with rotor 4790-A	50 dB (A) with rotor 4790-A
temperature control, infinitely variable	-	from -20 to +40 °C
<b>Cat. No.</b>	<b>4701</b>	<b>4706</b>
100–127 V 1 ~ / 50–60 Hz *)	4701-01	4706-01
consumption	900 VA	1,850 VA
emission, immunity	FCC class B	FCC class B
weight	approx. 84 kg	approx. 117 kg

\*) Other voltages on request.


## AVAILABLE ROTORS

<b>SWING-OUT ROTORS</b>		angle	max. RPM	max. capacity	Cat. No.	page
	swing-out rotor, 4-place	90°	4,800 min <sup>-1</sup>	4x600 ml	<b>4784-A</b>	3
	swing-out rotor, 4-place	90°	4,000 min <sup>-1</sup>	4x290 ml	<b>4753</b>	6
<b>ANGLE ROTORS</b>						
	angle rotor, 4-place	25°	9,500 min <sup>-1</sup>	4x250 ml	<b>4795</b>	8
	angle rotor, 6-place	45°	11,000 min <sup>-1</sup>	6x94 ml	<b>4794</b>	8
	angle rotor, 30-place	45°	15,000 min <sup>-1</sup>	30x2 ml	<b>4790-A</b>	9


## SWING-OUT ROTOR, 4-PLACE | 4784-A





<b>Rotor</b>	
max. RPM   max. RCF	4,800 min <sup>-1</sup>   4,740
max. capacity	4x600 ml
run-up   run-down, braked in sec	54   38
angle   max. noise level	90°   56 dB (A)
temperature in °C <sup>1)</sup>	+4
<b>Cat. No.</b>	<b>4784-A</b>




<b>Bucket with clamp lock</b>	
lid bioseal <sup>5)</sup>	4783
<b>Cat. No.</b>	<b>4780</b>


<b>Bucket without clamp lock <sup>14)</sup></b>	
<b>Cat. No.</b>	<b>4785</b>


<b>Vessels</b>																
capacity in ml	1.5	2.0	3	4	4	5	6	7	15	25	50	94	100	100	250	
Ø x L in mm	11 x 38	11 x 38	10 x 60	10 x 88	12 x 60	12 x 75	12 x 82	12 x 100	17 x 100	24 x 100	34 x 100	38 x 102	40 x 115	44 x 100	65 x 115	
max. RCF <sup>2)</sup>	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,559	4,559	4,559	4,534	4,534	
radius in mm	178	178	178	178	178	178	178	178	178	178	177	177	177	176	176	
<b>Cat. No.</b>	<b>microliter tubes</b>			<b>tubes <sup>2)</sup></b>												



<b>Adapter</b>																
boring Ø x L in mm	11.2x38	11.2x38	11.2x54	11.2x54	13.4x55	13.4x55	13.4x55	13.4x55	17.5x62	26.5x69	36x77	42x76.5	42x76.5	46x76.5	66x97	
vessels per rotor	96	96	140	140	104	104	104	104	72	28	16	12	12	8	4	
<b>Cat. No.</b>	<b>4773</b>	<b>4773</b>	<b>4761</b>	<b>4761</b>	<b>4762</b>	<b>4762</b>	<b>4762</b>	<b>4762</b>	<b>4763</b>	<b>4764</b>	<b>4765</b>	<b>4766</b>	<b>4766</b>	<b>4767</b>	<b>4768</b>	




<b>Vessels</b>															
capacity in ml	1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	1.6–7	1.6–7	4–7	8	8.5–10	5	15
Ø x L in mm	8 x 66	13 x 65	11 x 66	15 x 75	11 x 92	13 x 90	15 x 92	16 x 92	13 x 75	13 x 100	16 x 75	16 x 125	16 x 100	17 x 59	17 x 120
max. RCF <sup>2)</sup>	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,585	4,740	4,740
radius in mm	178	178	178	178	178	178	178	178	178	178	178	178	178	184	184
<b>Cat. No.</b>	<b>blood collection / urine vessels</b>													-	-



<b>Adapter</b>															
boring Ø x L in mm	11.2x54	13.4x55	11.2x54	17.5x62	11.2x54	13.4x55	17.5x62	17.5x62	13.7x55	13.7x55	17.5x62	17.5x62	17.5x62	17x52	17x84
vessels per rotor	140	104	140	72	140	104	72	72	84	84	72	24	72	48	52
<b>Cat. No.</b>	<b>4761</b>	<b>4762</b>	<b>4761</b>	<b>4763</b>	<b>4761</b>	<b>4762</b>	<b>4763</b>	<b>4763</b>	<b>4775</b>	<b>4775</b>	<b>4763</b>	<b>4763</b>	<b>4763</b>	<b>4778</b>	<b>4769</b>


1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.  
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.  
 3.6) When using these tubes, bucket 4780 cannot be closed with lid 4783.  
 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.  
 14) With the E3905 add-on kit and the 4783 lid, the 4785 carrier can be converted at a later time to a 4780 carrier with single-hand clamp lock.  
 21) Adapter must be loaded as illustrated.  
 29) Suitable for blood collection systems with a lid larger than 17 mm in diameter.

## SWING-OUT ROTOR, 4-PLACE | 4784-A



Rotor	
max. RPM   max. RCF	4,800 min <sup>-1</sup>   4,740
max. capacity	4x600 ml
run-up   run-down, braked in sec	54   38
angle   max. noise level	90°   56 dB (A)
temperature in °C <sup>1)</sup>	+4
<b>Cat. No.</b>	<b>4784-A</b>

<b>Bucket with clamp lock</b>	
lid bioseal <sup>5)</sup>	4783
<b>Cat. No.</b>	<b>4780</b>
<b>Bucket without clamp lock<sup>14)</sup></b>	
<b>Cat. No.</b>	<b>4785</b>



Vessels															
capacity in ml	50	12	25	30	50	10	30	50	85	94	175	175	200	225	250
Ø x L in mm	29 x 115	17 x 100	25 x 90	25 x 110	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102	61 x 118	62 x 144	60 x 130	61 x 137	61 x 122
max. RCF <sup>2)</sup>	4,688	4,688	4,585	4,585	4,688	4,585	4,585	4,688	4,534	4,534	4,740	4,740	4,740	4,740	4,740
radius in mm	182	182	178	178	182	178	178	182	176	176	184	184	184	184	184
<b>Cat. No.</b>	tubes with screw cap										Falcon	Nalgene	Nunc®	Falcon	5127 <sup>24)</sup>


Adapter															
boring Ø x L in mm	30 x 82.5	17.2 x 58.5	26.5 x 69	26.5 x 69	30 x 82.5	17.5 x 62	26.5 x 69	30 x 82.5	42 x 76.5	42 x 76.5	61 x 105	61.5 x 110	61.5 x 110	61 x 105	62 x 100
vessels per rotor	20	56	28	28	20	72	28	20	12	12	4	4	4	4	4
<b>Cat. No.</b>	<b>4770</b>	<b>4774</b>	<b>4764</b>	<b>4764</b>	<b>4770<sup>4)</sup></b>	<b>4763</b>	<b>4764</b>	<b>4770<sup>4)</sup></b>	<b>4766</b>	<b>4766</b>	<b>4776</b>	<b>4777</b>	<b>4777</b>	<b>4776</b>	<b>4771</b>

Vessels				
capacity in ml	290	400	400	600
Ø x L in mm	62 x 137	81 x 136	84 x 134	93 x 134
max. RCF <sup>2)</sup>	4,740	4,740	4,740	4,740
radius in mm	184	184	184	184
<b>Cat. No.</b>	<b>-<sup>24)</sup></b>	<b>-<sup>24)</sup></b>	<b>-<sup>24)</sup></b>	<b>0551<sup>24)</sup></b>

Adapter				
boring Ø x L in mm	62 x 100	85 x 100	85 x 100	94 x 99
vessels per rotor	4	4	4	4
<b>Cat. No.</b>	<b>4771</b>	<b>4772</b>	<b>4772</b>	<b>-</b>

1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.  
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.  
 3.6) When using these tubes, carrier 4780 cannot be closed with lid 4783.  
 4) Please remove the spacer.  
 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.  
 13) The screw cap for tube No. 0538 is available with Cat. No. 0539. Dimensions with cap 38 x 110 mm.  
 21) Adapter must be loaded as illustrated.  
 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

## SWING-OUT ROTOR, 4-PLACE | 4784-A




### Rotor

max. RPM   max. RCF	4,800 min <sup>-1</sup>   4,096
max. capacity	16 plates
run-up   run-down, braked in sec	54   38
angle   max. noise level	90°   56 dB (A)
temperature in °C <sup>1)</sup>	+4
<b>Cat. No.</b>	<b>4784-A</b>



### Bucket

<b>Cat. No.</b>	<b>4782</b>
-----------------	-------------



### Plates

W x D x H in mm	128x86x15	128x86x17.5	128x86x22	128x86x44.5	128x86x46	84x59x11	124x82x20	-	-
capacity in ml	-	-	-	-	-	-	-	-	0,2
max. RCF <sup>2)</sup>	4,096	4,096	4,096	4,096	4,096	4,096	4,096	4,096	4,096
radius in mm	159	159	159	159	159	159	159	159	159
<b>Cat. No.</b>	<b>MTP</b>	<b>MTP</b>	<b>CP</b>	<b>DWP</b>	<b>MS</b>	<b>Microtest plate</b>	<b>PCR plate 96 wells</b>	<b>PCR strips</b>	



### Adapter


boring Ø x L in mm	-	-	-	-	-	-	-	-	-
plates / strips per rotor	16	16	12	4	4	8	4	48 x 8	-
<b>Cat. No.</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>-</b>	<b>1485</b>	<b>1485</b>	

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.  
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.  
 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.


## SWING-OUT ROTOR, 4-PLACE | 4753



<b>Rotor</b>	
max. RPM   max. RCF	4,000 min <sup>1</sup>   2,898
max. capacity	4 x 100 ml
run-up   run-down, braked in sec	18   16
angle   max. noise level	90°   58 dB (A)
temperature in °C <sup>1)</sup>	-1
<b>Cat. No.</b>	<b>4753</b>



<b>Bucket</b>	
lid	5053
<b>Cat. No.</b>	<b>5051</b>

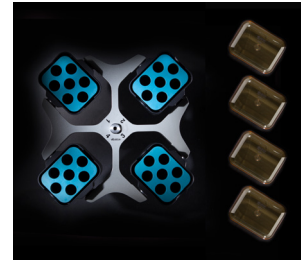

<b>Vessels</b>															
capacity in ml		1.5	2	1.5	2	3	5	6	7	9	15	25	50	100	100
Ø x L in mm		11x38	11x38	11x38	11x38	10x60	12x75	12x82	12x100	14x100	17x100	24x100	34x100	44x100	40x115
max. RCF <sup>2)</sup>	top / bottom	1,950 / 2,826	1,950 / 2,826	2,826	2,826	2,737	2,773	2,773	2,755	2,773	2,755	2,755	2,755	2,755	2,755
radius in mm	top / bottom	109 / 158	109 / 158	158	158	153	155	155	154	155	154	154	154	154	154
<b>Cat. No.</b>		<b>microliter tubes</b>				<b>tubes<sup>2)</sup></b>									

<b>Adapter</b>															
boring Ø x L in mm		12.5x42	12.5x42	11.5x50	11.5x50	11 x 44	12.5x42	12.5x42	12.5x86	16x50	17.5x86	26x86	36x86	45.5x86	42x86
vessels per rotor		160	160	64	64	80	80	80	80	48	48	20	8	4	4
<b>Cat. No.</b>		<b>5257</b>	<b>5257</b>	<b>5281</b>	<b>5281</b>	<b>5267</b>	<b>5227</b>	<b>5227</b>	<b>5247<sup>15)</sup></b>	<b>5264</b>	<b>5248<sup>15)</sup></b>	<b>5242</b>	<b>5243</b>	<b>5262</b>	<b>5249</b>

<b>Vessels</b>															
capacity in ml		1.1–1.4	2.6–3.4	2.7–3	4–5.5	4.5–5	4.9	7.5–8.5	9–10	10	1.6–5	4–7	4–7	8.5–10	
Ø x L in mm		8x66	13x65	11 x 66	15 x 75	11 x 92	13x90	15x92	16x92	15x102	13x75	13x100	16x75	16x100	
max. RCF <sup>2)</sup>		2,737	2,808	2,773	2,773	2,773	2,808	2,773	2,755	2,755	2,808	2,755	2,773	2,755	
radius in mm		153	157	155	155	155	157	155	154	154	157	154	155	154	
<b>Cat. No.</b>		<b>blood collection / urine vessels</b>													

<b>Adapter</b>															
boring Ø x L in mm		11 x 44	13.5x52	12.5x42	16x50	12.5x42	13.5x52	16x50	17.6x86	17.6x86	13.5x52	13.5x86	16x50	17.5x86	
vessels per rotor		80	48	80	48	80	48	48	44	44	48	48	48	48	
<b>Cat. No.</b>		<b>5267</b>	<b>5268</b>	<b>5227</b>	<b>5264</b>	<b>5227</b>	<b>5268</b>	<b>5264</b>	<b>5258</b>	<b>5258</b>	<b>5268</b>	<b>6301</b>	<b>5264</b>	<b>5248</b>	

<b>Vessels</b>							
capacity in ml		15	30	50	12	50	1–8
Ø x L in mm		17x120	25x110	29x115	17x100	29x115	simple / multiple
max. RCF <sup>2)</sup>		2,898	2,755	2,826	2,898	2,755	1,735 / 2,737
radius in mm		162	154	158	162	154	97 / 153
<b>Cat. No.</b>		<b>tubes with screw cap</b>				<b>cyto chambers</b>	

<b>Adapter</b>							
boring Ø x L in mm		17x90	26x66	30x86	17x90	36x86	-
vessels per rotor		28	20	8	28	8	8
<b>Cat. No.</b>		<b>6306</b>	<b>5266</b>	<b>5259</b>	<b>6306</b>	<b>5243</b>	<b>5280</b>

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.7) When using these tubes, bucket 4780 or 5051 cannot be closed with lid 4783 or 5053.



## SWING-OUT ROTOR, 4-PLACE | 4753



<b>Rotor</b>	
max. RPM   max. RCF	4,000 min <sup>1)</sup>   3,095
max. capacity	4 x 290 ml
run-up   run-down, braked in sec	18   16
angle   max. noise level	90°   58 dB (A)
temperature in °C <sup>1)</sup>	-1
<b>Cat. No.</b>	<b>4753</b>



<b>Bucket</b>	
lid bioseal <sup>5)</sup>	5093
<b>Cat. No.</b>	<b>5092</b>




<b>Vessels</b>															
capacity in ml	5	6	7	15	25	50	100	100	250	1.1-1.4	2.6-3.4	2.7-3	4-5.5	4.5-5	4.9
Ø x L in mm	12x75	12x82	12x100	17x100	24x100	34x100	44x100	40x115	65x115	8 x 66	13 x 65	11x66	15x75	11x92	13x90
max. RCF <sup>2)</sup>	3,005	3,005	3,005	2,952	2,898	2,952	2,952	2,952	3,095	2,540	2,540	2,540	2,952	3,005	2,952
radius in mm	168	168	168	165	162	165	165	165	173	142	142	142	165	168	165
<b>Cat. No.</b>	<b>tubes<sup>2)</sup></b>									<b>blood collection / urine vessels</b>					

<b>Adapter</b>															
boring Ø x L in mm	12.8x45	12.8x45	13.2x82	17.5x60.7	25.5x82	35.5x82.5	45.5x85	42x85	66x103	13.2x54.5	13.2x54.5	13.2x54.5	17.5x60.7	13.2x82	13.5x60.7
vessels per rotor	48	48	48	32	16	4	4	4	4	48	48	48	32	48	32
<b>Cat. No.</b>	<b>5128</b>	<b>5128</b>	<b>5120</b>	<b>5136</b>	<b>5122</b>	<b>5124</b>	<b>5125</b>	<b>5126</b>	<b>1791</b>	<b>5138</b>	<b>5138</b>	<b>5138</b>	<b>5136</b>	<b>5120</b>	<b>5137</b>

<b>Vessels</b>															
capacity in ml	7.5-8.5	9-10	10	1.6-5	4-7	4-7	8.5-10	8	15	50	12	25	30	50	10
Ø x L in mm	15x92	16x92	15x102	13x75	13x100	16x75	16x100	16x125	17x120	29x115	17x100	25x90	25x110	29x115	16 x 80
max. RCF <sup>2)</sup>	2,952	2,952	2,952	2,540	3,005	2,952	2,952	3,059	3,095	3,095	3,005	2,826	2,898	3,023	2,952
radius in mm	165	165	165	142	168	165	165	171	173	173	168	158	162	169	165
<b>Cat. No.</b>	<b>blood collection / urine vessels</b>									<b>tubes with screw cap</b>					

<b>Adapter</b>															
boring Ø x L in mm	17.5x60.7	17.5x60.7	17.5x60.7	13.2x54.5	13.2x82	17.5x60.7	17.5x60.7	17.5x82	17x85	30x85	17.5x82	26x73	25.5x82	30x99	17.5x60.7
vessels per rotor	32	32	32	48	48	32	32	28	28	8	28	12	16	8	32
<b>Cat. No.</b>	<b>5136</b>	<b>5136</b>	<b>5136</b>	<b>5138</b>	<b>5120</b>	<b>5136</b>	<b>5136</b>	<b>5121<sup>4)</sup></b>	<b>5129</b>	<b>5123</b>	<b>5121</b>	<b>5134</b>	<b>5122</b>	<b>5135</b>	<b>5136</b>



<b>Vessels</b>	
capacity in ml	250    290
Ø x L in mm	61 x 122    62 x 137
max. RCF <sup>2)</sup>	3,095    3,095
radius in mm	173    173
<b>Cat. No.</b>	<b>5127<sup>24)</sup></b> <b>-<sup>24)</sup></b>

<b>Adapter</b>	
boring Ø x L in mm	66x103    66x103
vessels per rotor	4    4
<b>Cat. No.</b>	<b>6319</b> <b>6319</b>

- 1) Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.
- 3.5) When using these tubes, bucket 5092 cannot be closed with lid 5053.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.

## — ANGLE ROTOR, 4-PLACE | 4795



### Rotor

max. RPM   max. RCF	9,500 min <sup>-1</sup>   12,007
max. capacity	4 x 250 ml
run-up   run-down, braked in sec	45   55
angle	25°
temperature in °C <sup>1)</sup>	+2
<b>Cat. No.</b>	<b>4795</b>



### Vessels

capacity in ml	15	25	94	15	50	10	30	50	85	94	250
Ø x L in mm	17 x 100	24 x 100	38 x 102	17 x 120	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102	61 x 122
max. RCF <sup>2)</sup>	11,301	10,897	10,292	10,998	10,090	11,402	10,897	10,090	10,292	10,292	12,007
radius in mm	112	108	102	109	100	113	108	100	102	102	119
<b>Cat. No.</b>	<b>tubes<sup>2)</sup></b>			<b>tubes with screw cap</b>							<b>5127<sup>24)</sup></b>



### Adapter

boring Ø x L in mm	17.6 x 83	26 x 80	38.6 x 88	17 x 106	30 x 100	16.6 x 70	26 x 80	29 x 90	38.6 x 88	38.6 x 88	61.5 x 109
vessels per rotor	28	12	4	20	4	32	12	4	4	4	4
<b>Cat. No.</b>	<b>5646</b>	<b>5642</b>	<b>5644</b>	<b>5637</b>	<b>5638</b>	<b>5641</b>	<b>5642</b>	<b>5643</b>	<b>5644</b>	<b>5644</b>	<b>-</b>

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.  
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.  
 24) At temperatures of over +40 °C and / or when not filled to capacity, bottles may warp during centrifugation.




## — ANGLE ROTOR, 6-PLACE | 4794



<b>Rotor</b>	
max. RPM   max. RCF	11,000 min <sup>-1</sup>   16,504
max. capacity	6 x 94 ml
run-up   run-down, braked in sec	40   63
angle   max. noise level	45°   58 dB (A)
temperature in °C <sup>1)</sup>	+4
<b>Cat. No.</b>	<b>4794</b>



<b>Lid bioseal<sup>5)</sup></b>	<b>INCLUSIVE</b>
<b>Cat. No.</b>	



<b>Vessels</b>																
capacity in ml		1.5 – 2	3	15	25	50	94	7.5 – 10	5	15	50	10	30	50	85	94
Ø x L in mm		11 x 38	10 x 60	17 x 100	24 x 100	34 x 100	38 x 102	15 x 102 / 16 x 92 <sup>36)</sup>	17 x 59	17 x 120	29 x 115	16 x 80	26 x 95	29 x 107	38 x 106	38 x 102
max. RCF <sup>2)</sup>		15,828	15,828	15,557	15,151	16,233	16,504	15,557	15,422	15,828	16,098	15,557	15,151	15,828	16,504	16,504
radius in mm		117	117	115	112	120	122	115	114	117	119	115	112	117	122	122
<b>Cat. No.</b>		-	<b>tubes<sup>2)</sup></b>					-	-	<b>tubes with screw cap</b>						

<b>Adapter</b>																	
boring Ø x L in mm		11.4 x 39	11.4 x 39	17.5 x 92	26 x 85	35 x 89	38.2 x 89.6	17.5 x 92	17 x 51	17 x 106	29.8 x 97	16.5 x 74	26 x 85	29 x 92	38.2 x 89.6	38.2 x 89.6	
vessels per rotor		24	24	6	6	6	6	6	6	6	6	12	6	6	6	6	
<b>Cat. No.</b>		<b>1449</b>	<b>1449</b>	<b>1451</b>	<b>1447</b>	<b>1463</b>	-	<b>1451</b>	<b>1476</b>	<b>1466</b>	<b>1454</b>	<b>1448</b>	<b>1447</b>	<b>1446</b>	-	-	


## — ANGLE ROTOR, 30-PLACE | 4790-A



<b>Rotor</b>	
max. RPM   max. RCF	15,000 min <sup>-1</sup>   24,400
max. capacity	30 x 2 ml
run-up   run-down, braked in sec	19   24
angle   max. noise level	45°   50 dB (A)
temperature in °C <sup>1)</sup>	+4
<b>Cat. No.</b>	<b>4790-A</b>



<b>Lid bioseal<sup>5)</sup>, phenol-resistant</b>	<b>INCLUSIVE</b>
<b>Cat. No.</b>	



<b>Vessels</b>								
capacity in ml		0.2	0.4	0.5	0.8	1.5	2	0.5
Ø x L in mm		6 x 18	6 x 45	8 x 30	8 x 45	11 x 38	11 x 38	10.7 x 36
max. RCF <sup>2)</sup>		24,400	24,400	24,400	24,400	24,400	24,400	23,394
radius in mm		97	97	97	97	97	97	93
<b>Cat. No.</b>		<b>microliter tubes</b>						<b>Pediatric</b>

<b>Adapter</b>							
boring Ø x L in mm		6 x 40	6 x 40	8 x 40	8 x 40	10.2 x 19.3	11.2 x 40.9
vessels per rotor		30	30	30	30	30	15
<b>Cat. No.</b>		<b>2024</b>	<b>2024</b>	<b>2023</b>	<b>2023</b>	<b>2031<sup>7)</sup></b>	<b>0788<sup>17)</sup></b>

1) For cooled versions: Lowest temperature achievable with precooling and max. speed.  
 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.  
 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.  
 7) For centrifugation at high speeds, we recommend to use form-fitting, phenol-resistant adapters. Cat. No. 2031.  
 17) Packaging unit 15 pieces.  
 36) Capacity in ml: 8.5-10 Ø x L in mm: 16 x 100.

## CERTIFICATIONS / REGISTRATIONS

Product certification:



Product registration:



Company certifications:




## DOWNLOADS

↓ [Operating manual – ROTINA 420 | 420 R](#)

↓ [General Catalog](#)

## DIMENSIONS | ROTINA 420

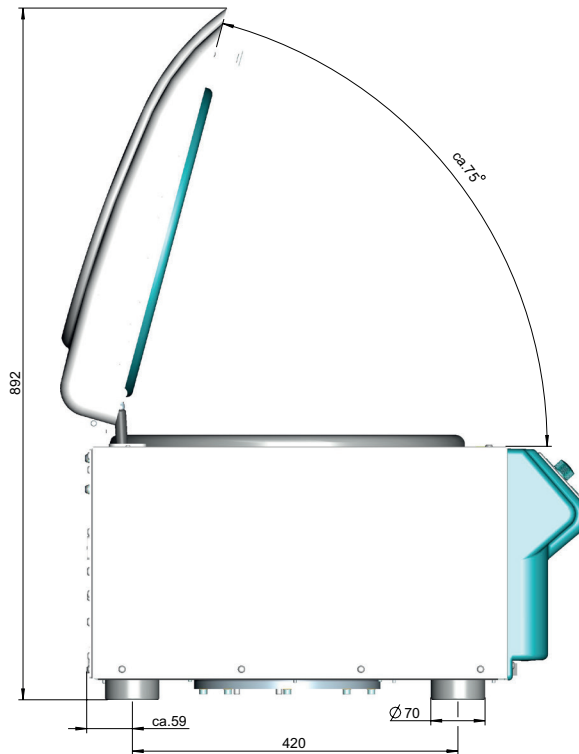

— DIMENSIONS | ROTINA 420 R

